


Removable Bollards In-ground Cam-Lok

Available in either freestanding or roller door models, Cam-Lok removable bollards are designed to protect businesses from costly ram raid robberies or damage. The bollard is locked deep into an in-ground sleeve, the internal locking mechanism being secured by a high quality cam lock with security registered keys.

Note: Bollards, sleeves and accessories ordered separately.

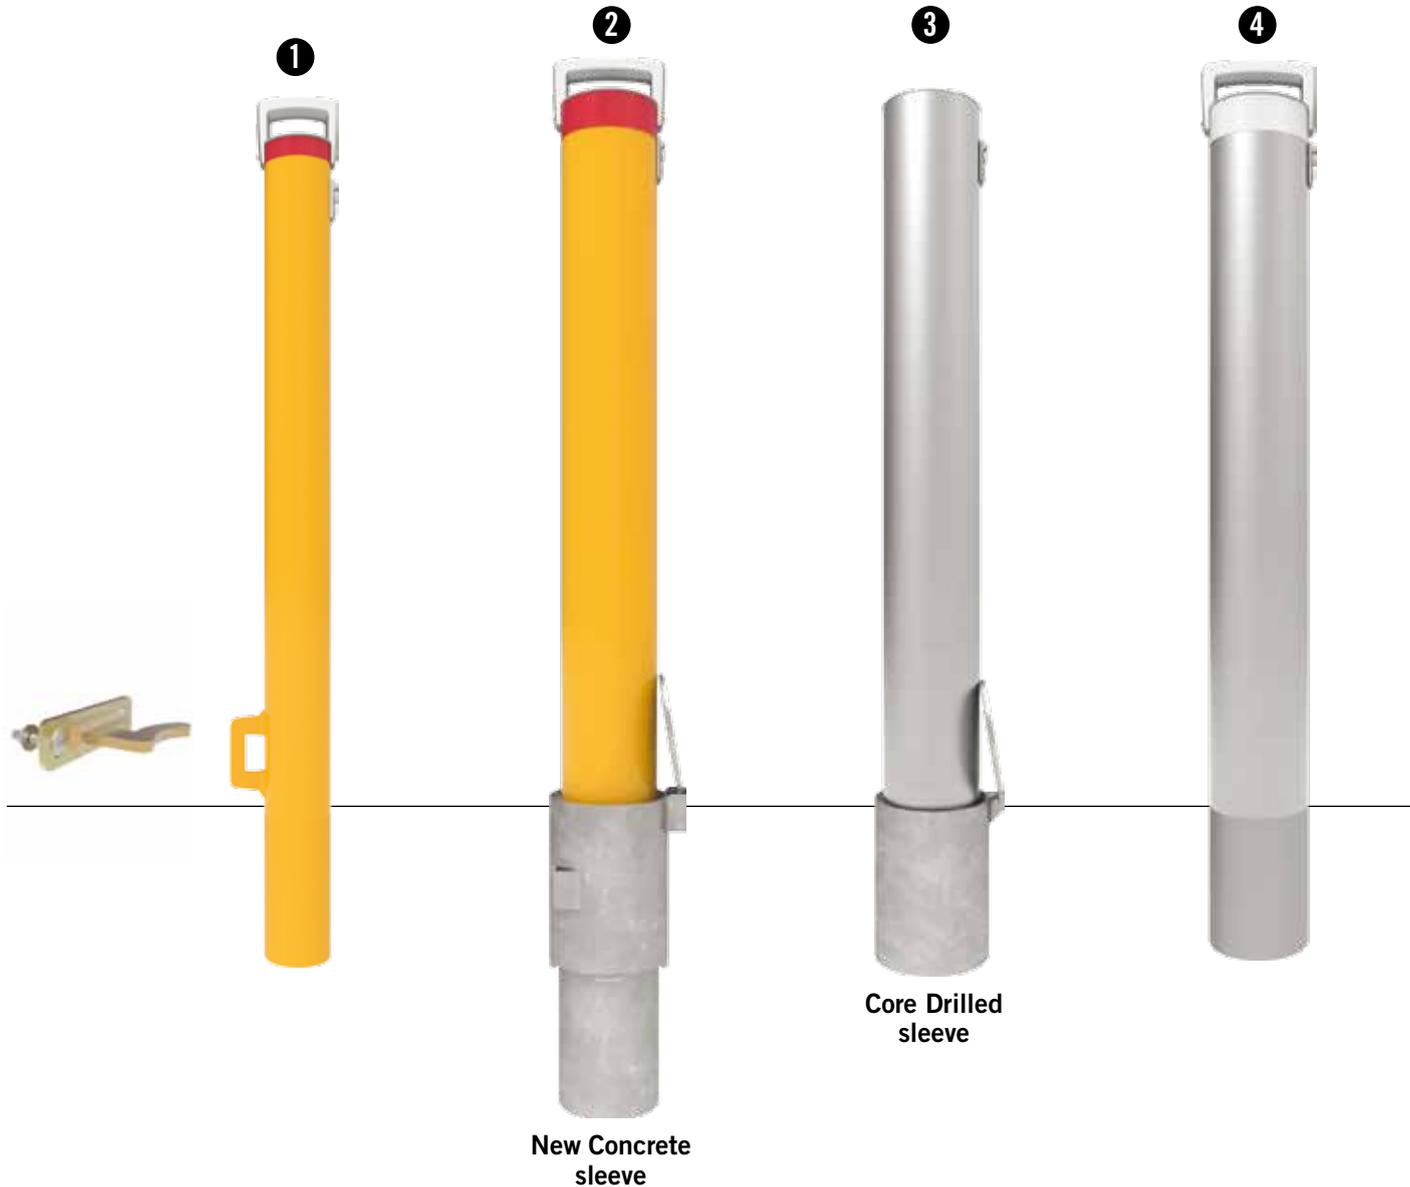

STYLE	PART No.	A	B	C	D	Kgs	FINISH	NC SLEEVES	E	CD SLEEVES	F
2	BCL90*	90	950	200	5	12.3	HDG+PC	BCL90S-NC	425	BCL90S-CD	225
2	BCL90-G*	90	950	200	5	12.3	HDG	BCL90S-NC	425	BCL90S-CD	225
3	BCL90-SS*	90	883	200	3.05	9	SS	BCL90SS-NC	425	BCL90SS-CD	225
4	BCL90-SSH*	90	950	200	3.05	9	SS+H	BCL90SS-NC	425	BCL90SS-CD	225
1	BCL90RD*	90	950	200	5	12.5	HDG+PC	BCL90S-NC	425	BCL90S-CD	225
1	BCL90RD-G*	90	950	200	5	12.5	HDG	BCL90S-NC	425	BCL90S-CD	225
2	BCL140*	140	1050	200	5	21	HDG+PC	BCL140S-NC	425	BCL140S-CD	225
2	BCL140-G*	140	1050	200	5	21	HDG	BCL140S-NC	425	BCL140S-CD	225
3	BCL140-SS*	140	983	200	3.4	21	SS	BCL140SS-NC	425	BCL140SS-CD	225
4	BCL140-SSH*	140	1050	200	3.4	21	SS+H	BCL140SS-NC	425	BCL140SS-CD	225
5	BHH	Wall mount bollard holder									
6	BCL90H	Cam-Lok 90mm surface mount bollard holder									
6	BCL140H	Cam-Lok 140mm surface mount bollard holder									
7	BCLKEY**	Cam-Lok additional registered key									

Note: All dimensions in mm – (A) Bollard diameter, (B) Height above ground, (C) Depth below ground, (D) Wall thickness, (E) New Concrete sleeve height, (F) Core Drilled sleeve height, Finish: Hot Dip Galvanised (HDG) only/and Powder Coated (PC), or 316 Stainless Steel (SS) only/and Aluminium cap with handle (H).

*Each order of one or more bollards is supplied with TWO registered keys.

**Additional keys are available to purchase separately.



5 Hanging holder




6 Surface mount holder



7 Additional keys

Removable Bollards In-ground Sleeve-Lok

Available in either freestanding or roller door models, Sleeve-Lok removable bollards are designed to protect businesses from costly ram raid robberies or damage. They are widely used for controlling vehicle access into sensitive areas. The bollard is locked into an in-ground sleeve by padlocking the steel sleeve cap to the bollard. **Note:** Bollards, sleeves and accessories ordered separately.

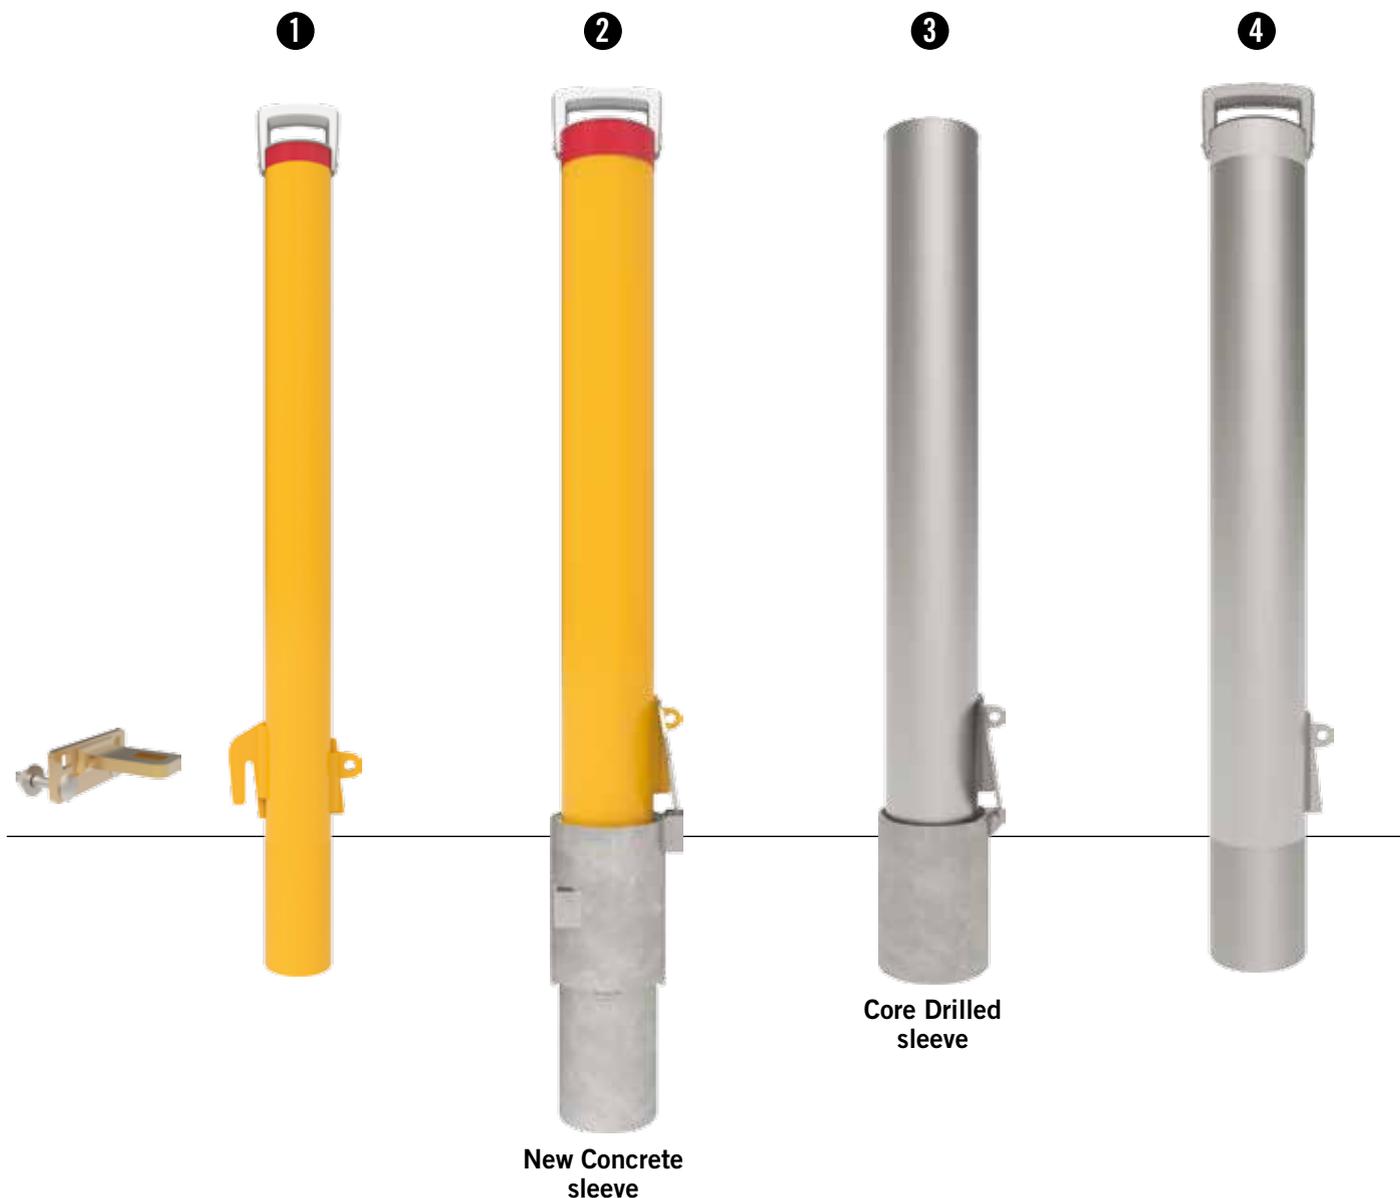

STYLE	PART No.	A	B	C	D	Kgs	FINISH	NC SLEEVES	E	CD SLEEVES	F
2	BSL63	63	900	150	1.6	4.5	HDG+PC	BSL63S-NC	300	BSL63S-CD	150
2	BSL63-G	63	900	150	1.6	4.5	HDG	BSL63S-NC	300	BSL63S-CD	150
2	BSL90	90	950	200	5	12	HDG+PC	BSL90S-NC	425	BSL90S-CD	225
2	BSL90-G	90	950	200	5	12	HDG	BSL90S-NC	425	BSL90S-CD	225
3	BSL90-SS	90	883	200	3.05	9	SS	BSL90SS-NC	425	BSL90SS-CD	225
4	BSL90-SSH	90	950	200	3.05	9	SS+H	BSL90SS-NC	425	BSL90SS-CD	225
1	BSL90RD	90	950	200	5	12.2	HDG+PC	BSL90S-NC	425	BSL90S-CD	225
1	BSL90RD-G	90	950	200	5	12.2	HDG	BSL90S-NC	425	BSL90S-CD	225
2	BSL140	140	1050	200	5	21	HDG+PC	BSL140S-NC	425	BSL140S-CD	225
2	BSL140-G	140	1050	200	5	21	HDG	BSL140S-NC	425	BSL140S-CD	225
3	BSL140-SS	140	983	200	3.4	21	SS	BSL140SS-NC	425	BSL140SS-CD	225
4	BSL140-SSH	140	1050	200	3.4	21	SS+H	BSL140SS-NC	425	BSL140SS-CD	225
5	BHH	Wall mount bollard holder									
6	BSL63H	Sleeve-Lok 63mm surface mount bollard holder									
6	BSL90H	Sleeve-Lok 90mm surface mount bollard holder									
6	BSL140H	Sleeve-Lok 140mm surface mount bollard holder									
7	BPL2	High security 9mm shielded padlock with 2 keys									

Note: All dimensions in mm – (A) Bollard diameter, (B) Height above ground, (C) Depth below ground, (D) Wall thickness, (E) New Concrete sleeve height, (F) Core Drilled sleeve height. **Finish:** Hot Dip Galvanised (HDG) only/and Powder Coated (PC), or 316 Stainless Steel (SS) only/and Aluminium cap with handle (H).



5 Hanging holder



6 Surface mount holder



7 BPL2 high security shielded padlock

Removable Bollards

Surface Mount Tee-lok

Surface mount removable bollards are designed for applications where the floor cannot be core drilled or penetrated. For example, clean areas such as food preparation or pharmaceutical processing. Tee-lok uses our unique 'T' handle key to unlock and remove the bollard from the receiver shoe. Ideal for traffic management. **Note:** Bollard and receiver shoe sold separately.



Receiver shoes



'T' handle key

STYLE	PART No.	A	B	C	D	E	Kgs	FINISH
1	SMTL*	90	950	5	200	20	12	HDG+PC
1	SMTL-G*	90	950	5	200	20	12	HDG
2	SMCLH	Surface mount receiver shoe – ZP+PC (3kg)						
2	SMCLH-Z	Surface mount receiver shoe – ZP (3kg)						
2	SMCLH-SS	Surface mount receiver shoe – SS (3kg)						
3	BRKEY-P**	Additional T-handle key for Tee-Lok						

Note: All dimensions in mm – (A) Bollard diameter, (B) Bollard height, (C) Bollard wall thickness, (D) Base plate diameter, (E) Shoe height. Finish: Zinc Plated (ZP) only/and Powder Coated (PC).

*Each order of one or more bollards is supplied with TWO T-Handle keys.

**Additional keys are available to purchase separately.



Removable Bollards

Surface Mount Cam-Lok

Surface mount removable bollards are designed for applications where the floor cannot be core drilled or penetrated. For example, clean areas such as food preparation or pharmaceutical processing. The surface mount Cam-Lok is a heavy duty bollard that locks into the surface mounted receiver shoe via an internal locking system, which utilises a high security cam lock with registered keys. **Note:** Bollard and receiver shoe sold separately.



Receiver shoes



Registered keys

STYLE	PART No.	A	B	C	D	E	Kgs	FINISH
1	SMCL*	90	950	5	200	20	12	HDG+PC
1	SMCL-G*	90	950	5	200	20	12	HDG
2	SMCL-SS*	90	950	3.05	200	20	12	SS
3	SMCLH	Surface mount receiver shoe – ZP+PC (3kg)						
3	SMCLH-Z	Surface mount receiver shoe – ZP (3kg)						
4	SMCLH-SS	Surface mount receiver shoe – SS (3kg)						
5	BCLKEY**	Additional Cam-Lok registered key						

Note: All dimensions in mm – (A) Bollard diameter, (B) Bollard height, (C) Bollard wall thickness, (D) Base plate diameter, (E) Shoe height. **Finish:** Zinc Plated (ZP) only/and Powder Coated (PC), or 316 Stainless Steel (SS).

*Each order of one or more bollards is supplied with TWO registered keys.

**Additional keys are available to purchase separately.

